

SELECTRONIC PREMIER PLUS THERMOSTATIC SHOWER


A

Selectronic Premier thermostatic showers offer the highest level of temperature accuracy. PLUS models also feature a longer riser rail with 250Kg* grab rail duty and a 2-metre shower hose, ideal for specification to assist seated showering in high care applications.



PLUS MODELS FEATURE A GRAB RAIL CARE PACK ACCESSORIES KIT

Dimensions:

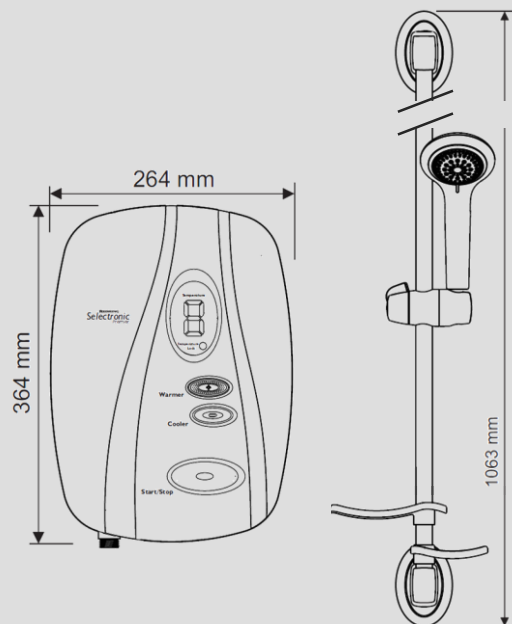

Key Features

- Accurate, temperature control to within $\pm 0.5^\circ$ for a comfortable and safe showering experience
- Push button controls with audible adjustment confirmation for ease of operation
- Large LED digital temperature display
- Phased shutdown safety protection for next user cool start up and scale protection
- 3 maximum temperature limiter lock options (40°C), (41°C), (43°C) or unlocked (25 - 46°C) set at installation
- Simple push button rapid commissioning
- Data logger for user and performance analysis
- Right hand side multi-entry connection options
- 5-spray mode shower head with easy rub-clean nozzles
- 250kg* load bearing grab riser rail with reinforced 4-point fixing brackets (*subject to correct wall material fixing use)
- 2mtr anti-kink flexible shower hose, adjustable handset clamp, soap dish and shower hose retaining ring.

Product Range

| Item Code: | Model No: | Description | kW |
|------------|-----------|--------------------------|------|
| 100085 | RSELP85P | Selectronic Premier PLUS | 8.5 |
| 100092 | RSELP95P | Selectronic Premier PLUS | 9.5 |
| 100108 | RSELP108P | Selectronic Premier PLUS | 10.8 |


Technical Details

| Model | RSELP85P | RSELP95P | RSELP108P |
|-------------------------------|-------------------------|-------------------------|-------------------------|
| Item Code | 100085 | 100092 | 100108 |
| EAN /Bar Code No. | 5011139100085 | 5011139100092 | 5011139100108 |
| Output (kW) | 8.5 | 9.5 | 10.8 |
| Current Rating (Amps) | 36 | 40 | 45 |
| Energy Rating (Class) | A | A | A |
| Energy Rating (%) | 37 | 37 | 37 |
| Consumption (kWh/A) | 495 | 488 | 489 |
| Load Profile | XS | XS | XS |
| Sound (dB) | 15 | 15 | 15 |
| Running Pressure psi (bar) | 10 (0.7) - 140 (10) | 10 (0.7) - 140 (10) | 10 (0.7) - 140 (10) |
| Temp Control Accuracy | $\pm 0.5^\circ\text{C}$ | $\pm 0.5^\circ\text{C}$ | $\pm 0.5^\circ\text{C}$ |
| Start-up Temperatures | 40, 41 or 43°C | 40, 41 or 43°C | 40, 41 or 43°C |
| Temperature range | 25 - 47°C | 25 - 47°C | 25 - 47°C |
| IP Rating | IPX5 | IPX5 | IPX5 |
| Approvals / Mark | BEAB & CE | BEAB & CE | BEAB & CE |
| UK Warranty (years) | 5* | 5* | 5* |

*Subject to product registration within 30 days.

SELECTRONIC PREMIER PLUS THERMOSTATIC SHOWER

Power and Water Connectivity

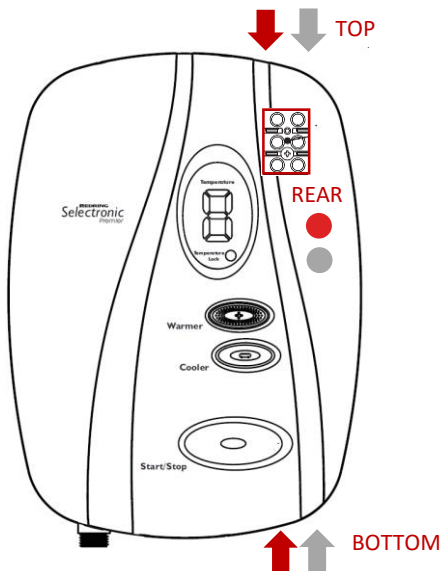

POWER ● → WATER ● →

Product Packaging Data

| | |
|-----------------------------|-----------------------|
| Model | RSELP85P / 95P / 108P |
| Item Code: | 100085/092 / 108 |
| Box dimensions (mm) | 1005 x 285 x 130 |
| Shower gross weight (Kg) | 5.1 |
| Shower unit net weight (Kg) | 4.2 |
| Full pallet quantity | 30 |
| Showers per layer | 3 |


Certification

| | |
|--------------------------------|-----|
| BEAB Approved | YES |
| BEAB CARE Approved | YES |
| RNIB Inclusive Design Endorsed | YES |
| WRAS Approved | YES |
| CE Marked | YES |

Pack Contents

- 1 x Instant Electric Thermostatic Shower Unit
- Shower accessory kit comprising of:
 - 1 x 1mtr long, 22mm diameter, 250kg* load bearing grab riser rail with reinforced 4-point fixing brackets
 - 1 x 5 mode easy rub-clean showerhead
 - 1 x 2mtr anti-kink flexible shower hose
 - 1 x Adjustable shower head holder clamp
 - 1 x Soap dish
 - 1 x Shower hose retaining ring
- 1 x Screw and wall plug fixing pack
- 1 x ErP energy rating label
- 1 x Installation and user guide

*250kg grab duty rail subject wall material strength and the correct wall fixings being used by installer

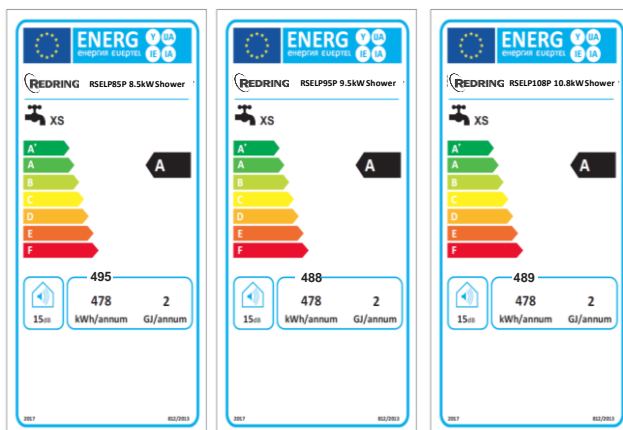

* Subject to product registration within 30 days.