



SFX/CW1128-5-PE-BLK-U

CW1128 5pr 0.5mm PJ Filled Black PE

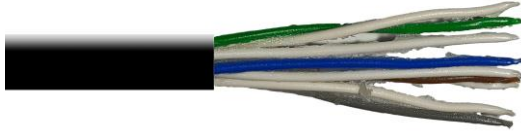

<b>Cable Construction</b>	5 Pairs	
Conductor	Solid Bare Copper	
Conductor Diameter (mm)	0.50 ±0.05	
<b>Insulation</b>	PE	
Insulation Thickness (mm)	0.20	
Insulation Diameter (mm)	0.90	
<b>Insulation Colours</b>		
Pair 1; Pair 2	White/Blue	White/Orange
Pair 3; Pair 4	White/Green	White/Brown
Pair 5	White/Grey	
Clear Tape Wrap	Petroleum jelly filled	
Nylon Rip-Cord		
<b>Jacket</b>	PE	
Jacket Thickness (mm)	1.00	
Overall Diameter (mm)	7.50	
Jacket Colour	Black	
Reaction to Fire	Fca	
<b>Electrical Characteristics</b>		
Max Conductor DC resistance @ 20°C	<117Ω/km	
Rated Temperature	70°C	
Insulation Resistance @20°C	>1500MΩ/km	
Standards	CW1128, RoHS2 2011/65/EU	
Application	Connection of secondary side telecom equipment (External).	