



SFX/TC-4-PVC-WHT

Budget 4pr CCS Telecom Cable White PVC CPR:Fca

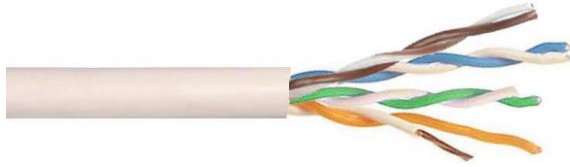

<b>Cable Construction</b>	4 Pairs	
Conductor	Copper Clad Steel	
Conductor Diameter (mm)	0.50 ±0.02	
<b>Insulation</b>	PVC	
Insulation Thickness (mm)	0.185	
Insulation Diameter (mm)	0.90 ±0.10	
<b>Insulation Colour(s) and Lay (mm)</b>		
Pair 1; Pair 2	White/Blue,Blue/White,53	White/Orange,Orange/White,56
Pair 3; Pair 4	White/Green,Green/White,58	White/Brown,Brown/White,61
Nylon Rip-Cord	210D	
<b>Jacket</b>	PVC	
Jacket Thickness (mm)	0.45	
Overall Diameter (mm)	4.60 ±0.20	
Jacket Colour	White RAL 9003	
Sheath Printing	CCS Telecom 4 PR RoHS2 (m)	
Reaction to Fire	Fca	
<b>Electrical Characteristics</b>		
Max Conductor DC resistance @ 20°C	<501.9Ω/km	
Rated Temperature (°C)	-20°C to 80°C	
Rated Voltage (V)	30V	
Insulation Resistance @20°C	>200MΩ/km	
Standards	CE 2014/30/EU, RoHS2 2011/65/EU	
Application	Interconnection of interior telecom equipment.	