



SFX/8C-TY3-PVC-WHT

8 Core TCCA Type 3 Alarm Cable White PVC CPR:Eca to BS4737-3.30:2015

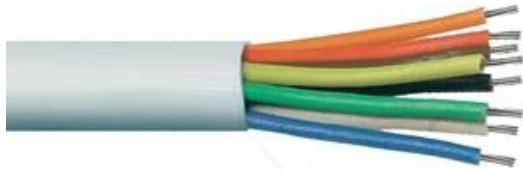

Cable Construction	7 Cores	1 Core
Conductor	Tinned Copper Clad Aluminium	Tinned Copper Clad Aluminium
Conductor Diameter (mm)	0.20 ±0.008 x 7	0.20 ±0.008 x 7
Stranded Diameter (mm)	0.22	0.22
Insulation	PVC	PVC
Insulation Thickness (mm)	0.21	0.30
Insulation Diameter (mm)	1.00 ±0.100	1.20 ±0.100
Insulation Colour(s)	Red,Black,Blue, Yellow,Green,White,Orange	Brown
Nylon Rip-Cord	Yellow 210D	
Jacket	PVC	
Jacket Thickness (mm)	0.50	
Overall Diameter (mm)	4.20 ±0.200	
Jacket Colour	White RAL 9003	
Sheath Printing	(m)	
Reaction to Fire	Eca	
Electrical Characteristics		
Max Conductor DC resistance @ 20°C	155Ω/km	
Rated Temperature (°C)	-20°C to 80°C	
Rated Voltage (V)	30V	
Insulation Resistance @20°C	>200 MΩ/km	
Compliance and Standards	BS4737-3.30:2015,RoHS2 2011/65/EU	
Application	For the interconnection of intruder alarm installations.	