


WPQC1 - IP68 Straight Waterproof Connector 3 Poles, no Screws

Box size: 30x30x95mm

Label: 28x90mm

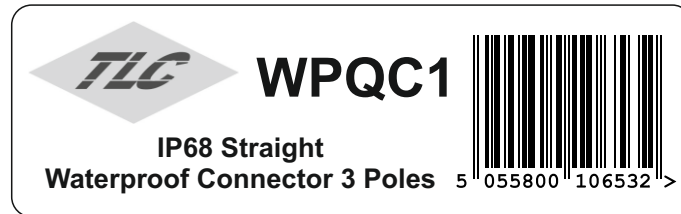

Instructions size: A6

LEDLITE™ ⓘ **User Instructions**

WPQC1 - IP68 Straight Waterproof Connector 3 Poles

IP68 **CE** **RoHS compliant**

Please read these instructions and retain them for future reference.

Important information

- Before installation please ensure that the power supply to the connector is switched off.
- It is recommended that connectors are installed by a qualified electrician ensuring the installation complies to current IEE wiring regulations & local building control.

Specifications:

- Housing Material: PA66
- Contacts material/plating: brass
- Silicon Sealing Gasket
- Rated Voltage: 250V
- Rated Current: 16A
- Wire Size: 0.75-2.5mm²
- Cable Outer Diameter: min. 5mm - max.11mm
- Waterproof Rate: IP68
- Fire Rating: UL94 - V0
- Gland size: M22
- Operating Temperature: -40° ~ +85°C
- Warranty: 3 Years

Dimensions:

O-Ring
 $\phi 5\text{mm} - \phi 10\text{mm}$
 $\phi 3\text{mm} - \phi 6.5\text{mm}$

Tool: Wrench (24mm)

3 Poles

Connection Mode: 3 Steps quick connection, no screws