aperta

APAUDH | AUDIO ONLY HANDSET
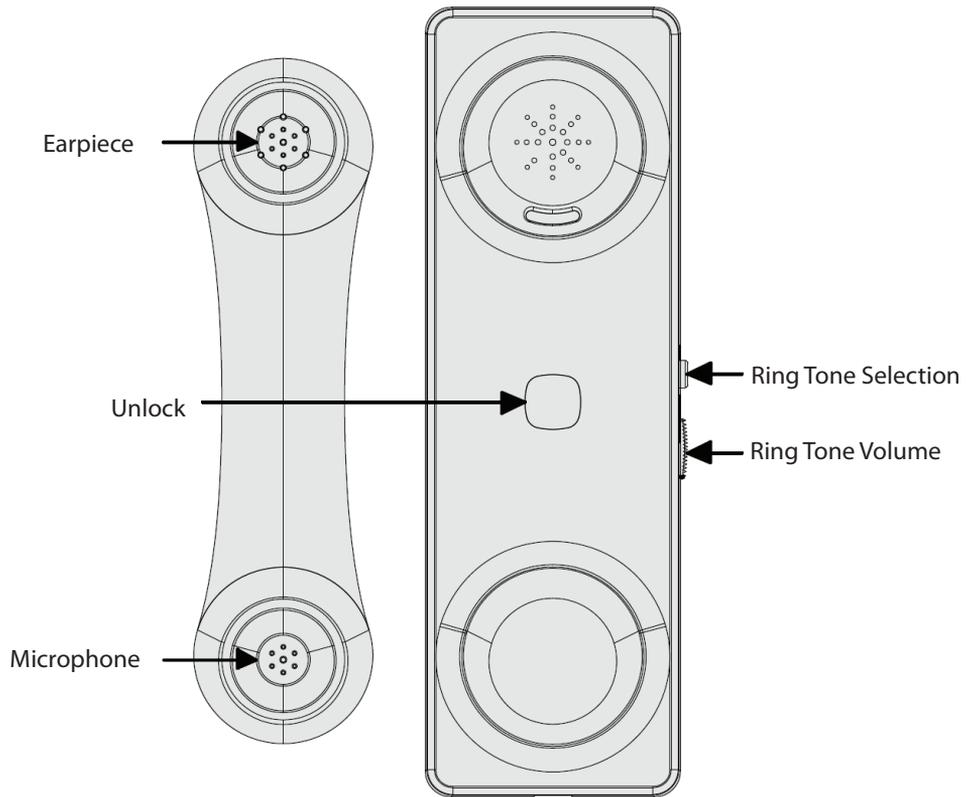

USER MANUAL

esp®

Handset Overview

Earpiece

Unlock

Microphone

Ring Tone Selection

Ring Tone Volume

Handset Overview

Terminals 1 and 2 for
BUS system connections

ON

1 2 3 4 5 6 7

Terminals 3 and 4
for optional
door bell connection

Dip switches 1-5 set Address ID
Required for apartment systems only.

Dip switch 7 set to ON for SLAVE position
Dip switch 7 set to OFF for MASTER position

Dip switch 6 set to ON
if handset is at the end of the system line
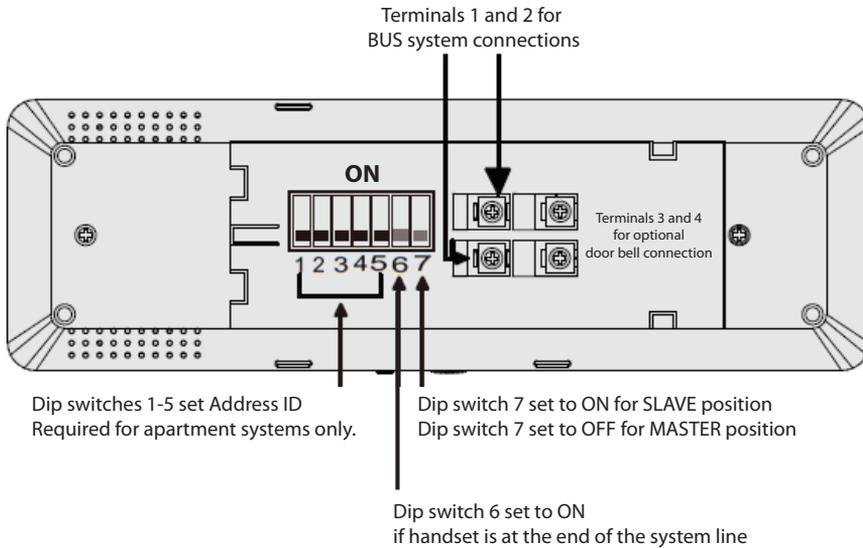
Installation

System Connections Example 1

BUS — SLAVE END OF LINE

BUS — SLAVE

BUS — MASTER

240vAC INPUT — POWER SUPPLY
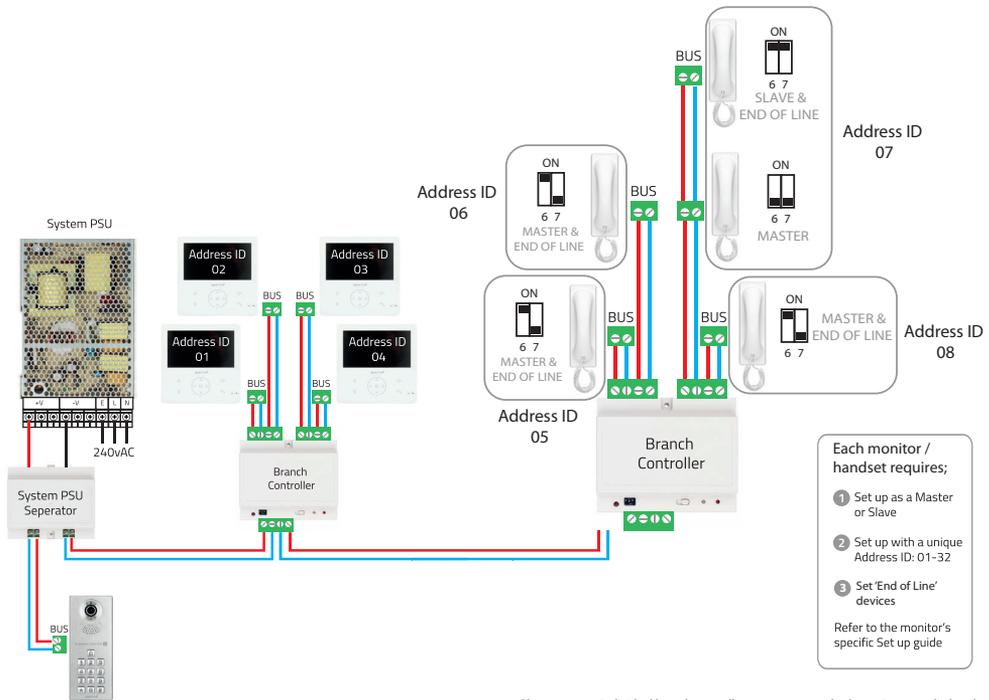
BUS
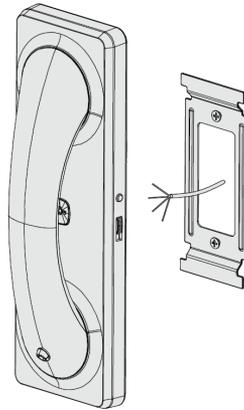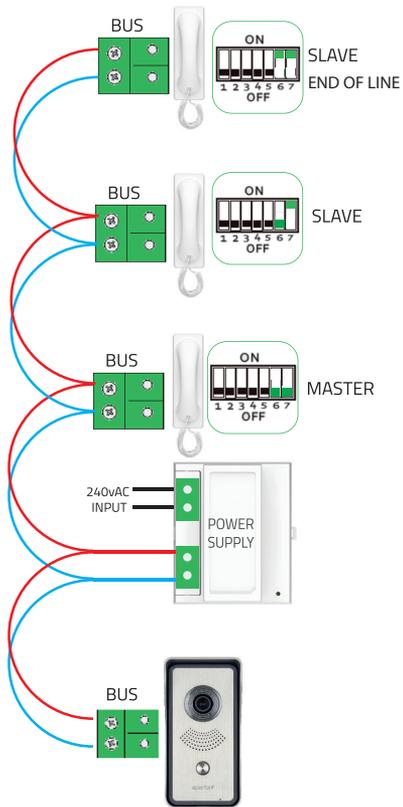
1. Only one device is set as the MASTER;

MASTER= ON 7 OFF

2. All other devices are set to SLAVE

SLAVE= ON 7 OFF

3. Last device on system line has dip switch 6 set to ON

END OF LINE= ON 6 OFF

4. When using different style monitors on the same system, please refer to supplied instruction to configure Master , Slave and End of line position.

System Connections Example2

Address ID 07

BUS
ON
6 7
SLAVE &
END OF LINE

ON
6 7
MASTER

Address ID 06

ON
6 7
MASTER &
END OF LINE

Address ID 08

ON
MASTER &
END OF LINE
6 7

Address ID 05

ON
6 7
MASTER &
END OF LINE

Branch Controller

System PSU

Address ID 02
Address ID 03
Address ID 01
Address ID 04

BUS BUS
BUS BUS

Branch Controller

System PSU Seperator

240vAC

BUS

Each monitor / handset requires;

1 Set up as a Master or Slave

2 Set up with a unique Address ID: 01-32

3 Set 'End of Line' devices

Refer to the monitor's specific Set up guide

Please note; an individual branch controller cannot support both monitor or audio handset.

26/04/2017   14:04:32

Setting the Address ID for apartment systems

Alter dip switches 1-5 on the rear of the handset to set the address ID	Dip switch settings 1-5	Address ID	Dip switch settings 1-5	Address ID	Dip switch settings 1-5	Address ID
		01		12		23
		02		13		24
		03		14		25
		04		15		26
		05		16		27
		06		17		28
		07		18		29
		08		19		30
		09		20		31
		10		21		32
		11		22		

CE

Elite Security Products
Unit 7, Target Park, Shawbank Rd
Lakeside, Redditch B98 8YN

esp®

Telephone: 01527 51 51 50
Fax: 01527 51 51 43
email: info@espuk.com

E&OE – Errors and omissions excepted. D17

www.espuk.com