

_ITE™ LTFLPWIFI - Smart Wi-Fi

NEW WiFi Smart LED PIR floodlights, compatible with Alexa and Google Home, CCT colour changeable, controlled by smart devices. Both the Floodlight and the PIR can be controlled through the Smart Life APP.

Group, Timer, DIY Scenes, Voice control and Schedule functions available. The PIR sensor can be linked with other smart WiFi devices through Automation. creating the possibility for multiple control situations. Applications: outdoor lighting, lift, lobby, common staircases, for basement or covered parking area, garden lights.



- Smart Control
- Security Sensor with Event Records
- Built-in Waterproof Connection
- CCT Changeable







Smart life, smart living














Works with Amazon Alexa and Google Assistant





















No Hub Required

App Dimmable

□□LITE™ Smart Wi-Fi CCT LED PIR Floodlight










Specifications:

- App Control: 2.4Ghz WiFi using Smart Life APP
- Compatible with Amazon Alexa & Google Home
- APP Light Control: CCT, Dimming, ON/OFF
- APP PIR Control:
 - o Detection Distance (up to 8m)
 - Lux Level (Ambient Light)
 - Light Duration
 - Stand-by Light
 - Stand-by Light Duration
 - Event Records
 - Link to other Smart devices through Automation
- Voltage: 220-240V • Frequency: 50/60Hz
- Current: 130mA
- Class I (Requires Earth Connection)
- Driver Type: DOB Driver
- Power: 20W
- LED Chip: 2835 SMD
- Lumen Output: 1620-1900lm (3000K-6500K) • Colour Changeable: 3000K-4000K-6500K
- CRI: >70
- Power factor: >0.5 Beam Angle: 110°
- Dimmable: Yes, through the APP only (10-100%)
- · Lifetime: 15000hours
- Operating Temp.: -20°C~ +40°C
- IP Rating: IP65 Floodlight / IP44 Sensor
- · Heatsink Material: Aluminium
- Built-in Waterproof Connection
- Dimensions: 148x159x56mm
- Weight: 355g

Dimensions(mm):









Smart Wi-Fi CCT LED PIR Floodlight

Sharing the joy of technology














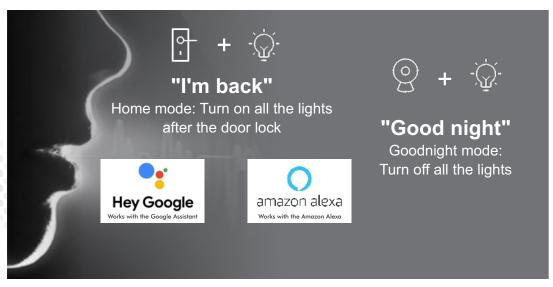



Control from anywhere with the free "SMART LIFE" Connect app