# DLITE<sup>™</sup> (i) Installation Sheet LTSPSF3

## **Surface Mounted Frame for LTSP32CCT Panel Lights**

Read these instructions before commencing installation and retain them for future reference.


### **Important information**


It is recommended that luminaires are installed by a qualified electrician ensuring the installation complies to current IEE wiring regulations & local building control. These products are designed for use with LTSP32CCT Slim Panel Lights. LEDLite will not accept responsibility for any claims arising from a poor installation.

### **Important User Advice**

Always switch off mains supply before servicing. This frame is suitable for indoor use only.

#### **Dimensions (mm):**





#### **Installation Procedure**

Warning! Switch off the power source before installation & maintenance

Tools required:






Hammer



Screwdriver

Step 1: Identify the location and direction of any hidden supply cables or service pipes before drilling fixing holes.

Step 2: Using the frame as a guide, mark the position of the fixing holes onto the wall/ceiling surface adjacent to the supply wiring (Fig.1).




**Step 3:** Drill holes at the positions marked and fit the plastic wall plugs (Fig.2).

Step 4: Fix the frame to the wall/ceiling by inserting the fixing screws provided into the wall plugs. (Fig. 3)



(Fig.3)

Step 5: Slide the LTSP32CCT Panel Lights into the frame (Fig. 4)

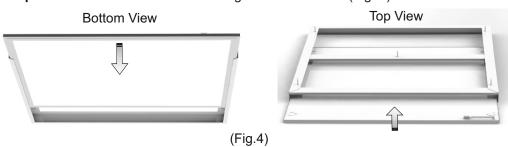

Step 6: Using the magnets on the installed frame, add the side panel to cover the end.

