
Sentry

Accessories

1:1



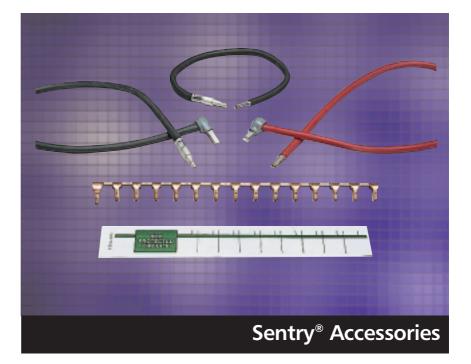

PRODUCT RANGE Description List No. 5802s RCD Insulation kit Split load kit (K series only) K5563s Main switch & 2 RCD cable kit (K series only) K5564s Multi-incomer kit (K series only) K5565s 11 way busbar (K series only) K5511s 20 way busbar (K series only) K5590s Barrel lock & key K5593s MCB Blank 5544s Extension terminal 55625 Locking device for MCB, RCD, RCBO etc. 8041s Padlock for use with 8041s Items for old non-K prefixed series consumer unit only: 11 way busbar 5511s 20 way busbar 5590s Spilt load kit 5563s Multi-incomer kit 5565s

Description

5802s – RCD insulation kit for use when an RCD is installed in a metal enclosure in an area of high earth loop impedance. The kit consists of a male and female screwed ring for fitting into a 32mm knockout and clamp for holding cables secure.

K5563s – Split-load kit for use when assembling a split-load arrangement not available as a standard unit. It consists of all necessary split load cabling (complete with terminals/ferrules). This kit MUST be used to ensure compliance with BS EN 60439-3 and is only suitable for Sentry Consumer Units 'K' series.

K5565s – For use when assembling a consumer unit in a multi-incomer arrangement with separate supply to each incomer. The kit consists of a black, flexible cable with pre-fitted terminals for the load side neutral return to the second neutral bar. This kit MUST be used to ensure compliance with BS EN 60439-3 and is only suitable for Sentry Consumer Units 'K' series.

K5590s – Busbar featuring 20 MCB ways for use with 'K' series Sentry Consumer unit.

K5511s – Busbar featuring 11 MCB ways for use with 'K' series Sentry Consumer unit.

5544s – The MCB blank is DIN rail mounted and designed to fill unused modules in Sentry Consumer Units and small enclosures.

5562s – Extension terminal for use in consumer unit. It enables direct connection of cables to the neutral bar and consists of a 25mm² capacity terminal with clamp screw.

8041s – The locking device is used with a Sentry MCB, RCBO, RCD or switch disconnector for locking in either the ON or OFF position.

8000s – A Padlock for use when locking the non-K prefixed series Sentry Consumer Unit with transparent lid, or in conjunction with the 8041s Locking Device when locking an MCB, RCBO, RCD or switch disconnector. Supplied with 2 keys.

K5593s – Barrel lock and key kit for securing the lid to the cover preventing access to the devices.

K5564s – Main switch and 2 RCD cable kit comprising double live and neutral cables and two single neutral cables.

Items for old non-K prefixed series Sentry Consumer unit only:

5563s – Split-load kit for use when assembling a split-load arrangement not available as a standard unit. It consists of all necessary split load cabling (complete with terminals/ ferrules), busbar and circuit identification labelling. This kit MUST be used to ensure compliance with BS EN 60439-3 and is only suitable for Sentry Consumer Units.

5565s – For use when assembling a consumer unit in a multi-incomer arrangement with separate supply to each incomer. The kit consists of a black, flexible cable with prefitted terminals for the load side neutral return to the second neutral bar, a busbar and a multi-incomer label. This kit MUST be used to ensure compliance with BS EN 60439-3 and is only suitable for Sentry Consumer Units.

5590s – Busbar featuring 20 MCB ways and one main incomer finger.

5511s – Busbar featuring 10 MCB ways and one main incomer finger.