

## Aventa Shower Kit

Bathroom, shower, en-suite and utility room ventilation



- In-line mixed flow fans
- Flow rate up to 280 m<sup>3</sup>/h
- Designed for ducted installations
- High pressure, low noise
- Compact and quiet in operation
- LED lamp version available
- Two speed (normal and boost)
- Adjustable overrun timer version
- Low Watt motor
- IPX4 rating
- Complies with Building Regulations
- 3 year warranty

### Aventa In-Line range

The Aventa range provides compact, quiet and powerful remote mounted ventilation for ducted installations. Available in high performance, two speed versions they are less bulky than larger in-line centrifugal fans and can be installed in loft spaces or service shafts for remote extraction.

## Choose your fan

**3**  
YEAR  
Warranty



Model	Contents of Kit	Flow Rate	Sound Level
Aventa 100T - 9041407	Aventa 100T, 6m flexible ducting, ties, extract valve, external grille, adjustable timer 2 - 30 minutes	40 / 52 l/s	27 / 36 dB(A)
Aventa 125T - 9041406	Aventa 125T, 6m flexible ducting, ties, extract valve, external grille, adjustable timer 2 - 30 minutes	66 / 88 l/s	28 / 37 dB(A)

Model	Contents of Kit	Flow Rate	Sound Level
Aventa 100T with Light - 9041408	Aventa 100T, 6m flexible ducting, ties, LED lamp 4 watts (220 Lumens). Driver included. Chrome and white internal grilles, external white grille, adjustable timer 2 - 30 minutes	40 / 52 l/s	27 / 36 dB(A)

## Aventa Shower Kit

Bathroom, shower, en-suite and utility room ventilation



- In-line mixed flow fan
- Flow rate up to 280 m<sup>3</sup>/h
- Designed for ducted installations
- High pressure, low noise
- Compact and quiet in operation
- Two speed (normal and boost)
- Adjustable overrun timer version
- Access to motor and impeller without dismantling ductwork
- Low Watt motor
- IPX4 rating
- Complies with Building Regulations
- 3 year warranty

### MODELS

**Timer** Adjustable timer overrun between 2 and 30 minutes

### CONTENTS OF KIT

<b>9041407</b>	AVT 100T, 6 m flex duct, ties, extract valve, external grille
<b>9041408</b>	AVT 100T, 6 m flex duct, ties, LED lamp 4 watts (220 Lumens) with driver, chrome and white internal grilles and white external grille
<b>9041406</b>	AVT 125T, 6 m flex duct, ties, extract valve, external grille




LED Lamp option

### TECHNICAL DATA

Specification	Aventa 100T Shower Kit	Aventa 100T Shower Kit with Light	Aventa 125T Shower Kit
Air flow m <sup>3</sup> /h	145 / 187	145 / 187	220 / 280
Air flow l/s	40 / 52	40 / 52	66 / 88
Fan type	Mixed Flow	Mixed Flow	Mixed Flow
Controls	Timer	Timer	Timer
Mounting	In-Line	In-Line	In-Line
Sound pressure dB(A)@3 m	27 / 36	27 / 36	28 / 37
Power Watts	21 / 33	21 / 33	23 / 37
Amps	0.11 / 0.21	0.11 / 0.21	0.18 / 0.27
Building Regulations ADF	Yes	Yes	Yes
Duct diameter (mm)	100	100	125
Voltage	230 V / 1 ph / 50 Hz	230 V / 1 ph / 50 Hz	230 V / 1 ph / 50 Hz
Rating	IPX4	IPX4	IPX4
Material finish	ABS	ABS	ABS
Weight (kg)	1.5	1.5	1.5
Dimensions (H x W x D) mm	190 x 246 x 126	190 x 246 x 126	190 x 246 x 136
Part No.	<b>9041407</b>	<b>9041408</b>	<b>9041406</b>

### DIMENSIONS (mm)

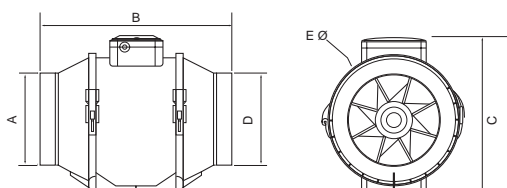

Model	A	B	C	D	E
AV100	96	246	190	96	167
AV125	123	246	190	123	167