

## BFH Flush Fitted Fan Heaters

BFH24T / BFH24TB / BFH24TS



## Product Description

A small and unobtrusive plinth heater with remote control

## Key Features

- A variable thermostat
- Fan only option for cool air circulation
- Choice of white, brown or stainless steel
- Features integral controls for ease of installation

## Technical Specification

**Controls**

Remote control models

Switch panel - 13 amp fuse, double pole isolating switch, 2 single pole on/off switches controlling elements

Thermostat control knob on front of heater with a temperature range of approximately 5°C to 35°C.

**Thermostat**

Bi-metal type, air temperature sensing

**Cable**

2.5 metre 6-core colour coded cable is supplied for connecting heater to switch panel.

**Elements**

Fully strung, helically wound, 800w and 1600W combine to give 2400W maximum output

**Thermal Cut Out**

Interrupt supply to reset type

**Colour/Finish**

BFH24T - White


BFH24TB - Dark Brown

BFH24TS - Stainless Steel

**Standard Warranty**

12 months

## Product Range Details \*

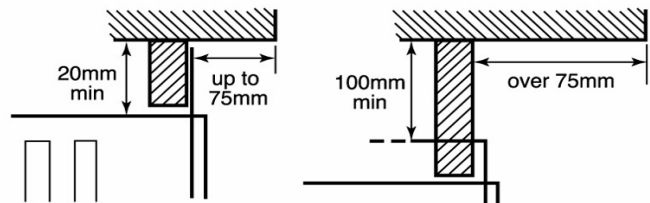

	BFH24T	BFH24TB	BFH24TS
<b>Performance</b>			
Loading (kW)	2.4	2.4	2.4
No Elements	2 (800W, 1600W)	2 (800W, 1600W)	2 (800W, 1600W)
<b>Dimensions</b>			
Height (mm)	120	120	120
Width (mm)	500	500	500
Depth (mm)	235	235	235
Weight (kg)	3.9	3.9	3.9

## Additional Information

\* If the overhang above the heater is greater than 75mm, then a distance of at least 100mm must be maintained between the overhang and the uppermost part of the heater.

## Accessories