

## Concepta

## product data sheet

# THQF370C-WH/S/L



### Description

A robust, diecast aluminium range of spotlights. Fully adjustable body and head. Ideal for accent lighting in retail, commercial and leisure environments.

### APPLICATIONS

Ideal for highlighting and general lighting in retail, leisure and commercial applications, particularly where high levels of illumination are required with low maintenance and running costs.

### SALES FEATURES

#### Comprehensive range

20W, 35W or 70W; spot (27°) or flood (63°) beam; lamp supplied. Two track versions in addition to standard version for Illuma 1-circuit track: for Concord, Global and Thorn 1-circuit track (order THQF320C/G1/L etc); for Global 3-circuit track (order THQF320C/G3/L etc). Surface-mounting versions. Attachments available to control glare and create colour effects. White, black or silver-grey finish.

#### Quality

Fully adjustable: body rotates 355°, lighting head tilts 90°. Integral electronic gear provides constant power, shuts off faulty lamps to eliminate pulsing and protect the gear, gives flicker-free lighting, improved colour maintenance and virtually silent operation. F-marked: suitable for direct mounting on flammable surfaces. Guaranteed for five years (except lamps).

#### Ease of installation

Easy installation and removal from track. The adaptor locks the spotlight positively to the track, and on the standard version incorporates a switch for individual switching. Surface spotlights are pre-wired to a 10A terminal block. Integral control gear simplifies wiring and installation.


#### Lamp description

Crisp, white light.  
Excellent colour rendering.  
Output blends well with light from 12V tungsten halogen lamps.  
Long life reduces maintenance costs.  
Energy-efficient: up to 8 times the lumens per watt of a GLS lamp

## TECHNICAL SPECIFICATION

### Technical Data

Cut out dia. (mm)	0
IP Rating	20
Weight (kgs)	0.96
Input Voltage(V)	240V
Dimming	Not Suitable for Dimming

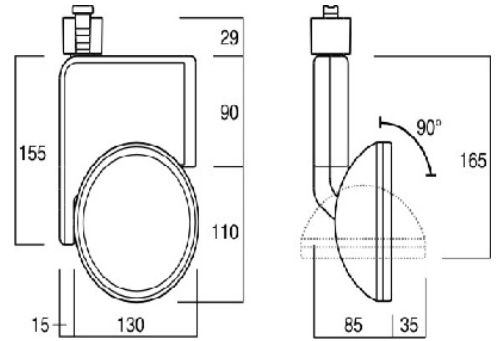

## MATERIALS

Body	Diecast Aluminium
Lighting Head	Diecast Aluminium
Reflector	Super pure Aluminium

## LAMP DATA

Lamp Type	Lamp Cap	No.	Lamp Watts	Lamp Current	Lamp Lumens	Lamp Life
CDM-TC	G8.5	1	70	0.31	6600	12000