

Wilmslow Single Head Street Post

IP44

Construction	: Stainless Steel
Grade	: AISI 316L
Diffuser	: Polycarbonate
Finish	: Brushed Effect

Installation Details:

Turn off any power supply before starting any installation. Locate a suitable position for the luminaire. Prepare the mains wiring, leaving enough spare to make connections inside the luminaire.

Using the mounting base as a template, mark the hole positions for any fixings used to secure the luminaire. Drill holes to suit expandable rawl bolts supplied. Assemble the head as detailed opposite.

Terminate the wiring from the head section to the base section detailed below. Bolt the base into position.

Offer the top section to the base and tighten any securing fixings. Remember to leave enough loose wiring for any potential maintenance or lamp replacement at a later date.


Terminate the mains wiring to the luminaire's wiring into the connection block behind the maintenance cover in the base section. See detail below.

Tidy any excess wiring, ensuring that no wires can be trapped or pinched during the final assembly of the luminaire.


Turn on power supply and test luminaire.

On completion of the installation, please hand this instruction sheet to your customer as it has useful information on the reverse maintenance and cleaning.

Termination behind inspection cover

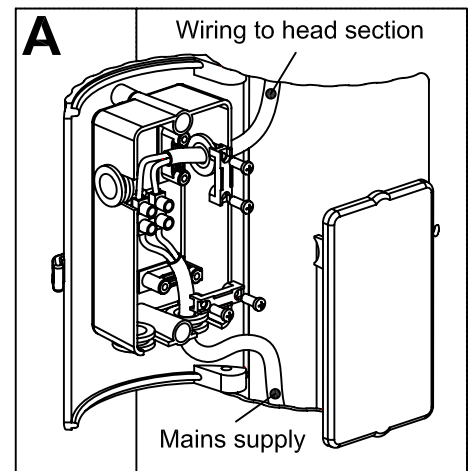



Securing the base

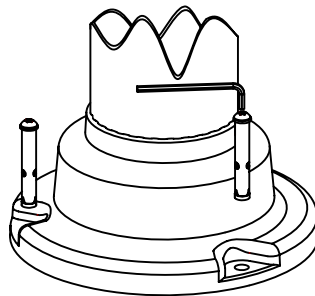

Use base plate as a template for drilling holes.



Class II Wiring. Mains supply in Base. Double Insulated - No Earth Required.



Lamp Details :
E27 GLS
100W Max

JCC only recommends branded lamps: Sylvania, Philips, Osram, GE and BLV.