

Lugo

Bollard Range

Bollards



Data Sheet

Product Information

The Lugo Bollard Range is ideal for path lighting and feature lighting for residential applications. With its decorative design it is ideal for high end applications.

Supplied in an anthracite finish
Complete with a 2 year warranty.
Not suitable for high saline areas.

Product Features

- 2 year warranty
- Class I
- IP65
- Supplied in 3000K as standard
- 188° emitting beam angle
- 2 heights available
- Strong Cast Aluminium Body
- L70-40,000hrs

Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	CRI (Ra)	Protection Class
KSR1915	Lugo 12w LED 450mm Bollard	12w	3000	960	83	I
KSR1916	Lugo 12w LED 650mm Bollard	12w	3000	960	83	I

Nominal voltage	100~240VAC
Operating frequency	50/60Hz
Circuit Wattage	12.8w LED including losses
Circuit Current	0.075A
Driver mA Rating	TBC
PFC	0.75
In Rush Current	TBC
Ambient temperature range	-10°c to +40°c
IP rating	65

Construction

Body: Cast Aluminium
Lens: Polycarbonate

Standards


BSEN60598-1:2021 Luminaires – Part 1: General requirements and tests

In Conformity with


LVD Low voltage directive 2014/35/EU
EMC Electromagnetic compatibility directive 2014/30/EU
ERP Energy related products directive 2019/2020/EU
RoHS Restriction of hazardous substances 2015/863/EU

Product Dimensions

KSR1915

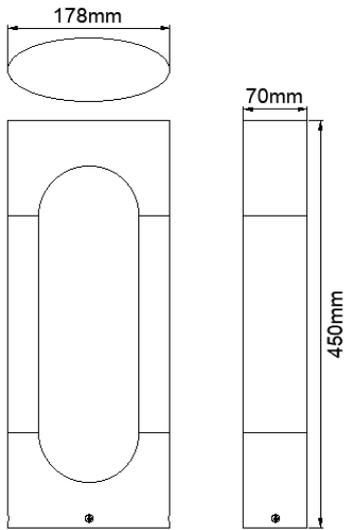

KSR1916

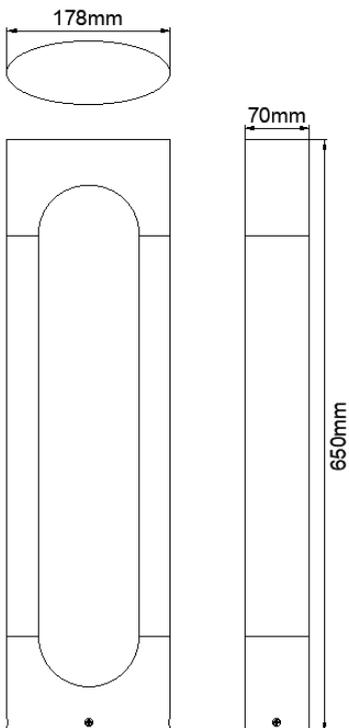

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.