


DATA SHEET:

BT9CTEMS / BT14CTEMS / BT20CTEMS

ISSUE: DCJUL19VOL2

230V IP65 CCT Adjustable LED Emergency Bulkhead with Microwave Sensor

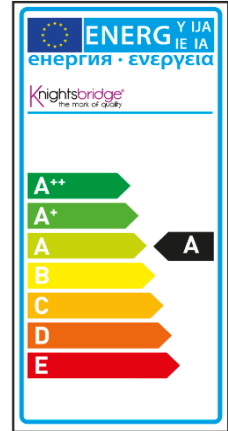

MLA part code	BT9CTEMS	BT14CTEMS	BT20CTEMS
Description	9W CCT Adjustable LED Emergency Bulkhead with Microwave Sensor	14W CCT Adjustable LED Emergency Bulkhead with Microwave Sensor	20W CCT Adjustable LED Emergency Bulkhead with Microwave Sensor
Finish	White (alternative bezels available)		
Nett weight (kg)	0.8	1.2	1.5
Wattage (W)	9	14	20
Lumens (lm)	3000K – 665 ± 5% 4000K – 760 ± 5% 5700K – 700 ± 5%	3000K – 1085 ± 5% 4000K – 1285 ± 5% 5700K – 1130 ± 5%	3000K – 1530 ± 5% 4000K – 1760 ± 5% 5700K – 1640 ± 5%
Lumens in emergency mode (lm)	3000K – 118 ± 5% 4000K – 128 ± 5% 5700K – 125 ± 5%	3000K – 122 ± 5% 4000K – 137 ± 5% 5700K – 138 ± 5%	3000K – 112 ± 5% 4000K – 119 ± 5% 5700K – 119 ± 5%
Efficacy (lm/W)	3000K – 74 4000K – 84 5700K – 78	3000K – 78 4000K – 92 5700K – 81	3000K – 77 4000K – 88 5700K – 82
Dimensions (mm)	Diameter – 256mm Height – 74mm	Diameter – 315mm Height – 74mm	Diameter – 380mm Height – 81mm
CCT	3000K / 4000K / 5700K		
CRI	>80		
Running current (A)	0.04	0.07	0.09
P. F	0.9		
Sensor detection range	Adjustable to maximum 12m depending on location		
Sensor duration	Adjustable from 5 seconds to 30 minutes		
Sensor lux settings	Adjustable from 2 lux to 50 lux / Disable		
Life span (Hrs)	30,000		
Input voltage	Mains 230V 50Hz		
Construction	Polycarbonate		
Class	Class II		
IP rating	IP65		
Warranty	3 Years (Battery 1 Year)		
Dimmable	No		
Origin of Manufacture	China		
Declaration of Conformity (held on file)	Yes		
Manufactured in accordance with	BS EN 60598		
EAN	5055832992752	5055832989202	5055832992844