


DATASHEET



BATS4S BATS5S BATS6S 230V LED Sensor Batten

www.mlaccessories.co.uk

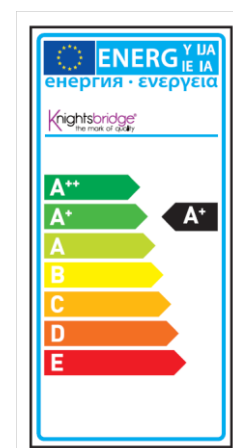

MLA PART CODE	BATS4S	BATS5S	BATS6S
DESCRIPTION	4ft LED Sensor Batten	5ft LED Sensor Batten	6ft LED Sensor Batten
FINISH	White		
NETT WEIGHT (KG)	1.33	1.6	1.84
DIMENSIONS (MM)	Length – 1225 Width – 61 Projection – 71	Length – 1525 Width – 61 Projection – 71	Length – 1790 Width – 61 Projection – 71
WATTAGE (W)	22	37	42
LAMP TYPE	SMD LED		
LUMENS (LM)	2625 \pm 5%	4290 \pm 5%	4970 \pm 5%
EFFICACY (LM/W)	116	115	116
CCT	4000K		
LED COLOUR	Cool White		
CRI	>80		
CIRCUIT WATTAGE (W)	22.47	37.13	42.72
RUNNING CURRENT (A)	0.102	0.180	0.194
POWER FACTOR	>0.9		
SENSOR DETECTION RANGE	6m at height 3m, max. mounting height 6m		
SENSOR DURATION	5s - 30s - 90s - 3min - 20min - 30min		
SENSOR LUX SETTINGS	2lux - 10lux - 25lux - 50lux - Disable		
SENSOR DETECTION ANGLE	150 ⁰ (wall mounted), 360 ⁰ (ceiling mounted)		
MANUAL OVERRIDE	No		
LIFE SPAN (HRS)	50,000		
INPUT VOLTAGE	Mains 230V 50Hz		
CONSTRUCTION	Pressed Steel & Polycarbonate		
CLASS	Class I		
IP RATING	IP20		
DIMMABLE	No		
WARRANTY	5 years		
ORIGIN OF MANUFACTURE	China		
DECLARATION OF CONFORMITY (HELD ON FILE)	Yes		
MANUFACTURED IN ACCORDANCE WITH	BS EN 60598		
EAN	5056270807202	5056270807219	5056270807240

KOMAR20_V1