



LTFL10M 10W 3-CCT Selectable LED Floodlight with Microwave Sensor & Remote Control

The 10W Microwave Sensor 3-CCT Selectable LED Floodlight offers advanced motion detection with a wider range and higher sensitivity compared to traditional PIR sensors. It activates instantly when motion is detected, providing reliable lighting for security and energy efficiency. Durable and versatile, it's perfect for car parks, building exteriors, and other high-traffic outdoor spaces.




Applications:

- Gardens & driveways
- Building facades
- Parking areas
- Commercial outdoor lighting

Features & Benefits:

- **3 x CCT Selectable** (3000K / 4000K / 6000K)
- **100 lm/W Efficiency**
- **IP65 Rated** – Weather Resistant
- **CRI>80**
- **Class I** - Requires earth connection.
- **Material:** Die cast Aluminium body with tempered glass diffuser
- **Built-in Microwave Sensor** with remote control (included)
- **Manual Override Facility**
- **Slim, Durable Design**
- **Slide-in Bracket** for quick and easy installation
- **Additional round bracket**
- **Colour Temperature Switch:** Accessible on the remote control (included) for easy on-site adjustment

Dimensions(mm):

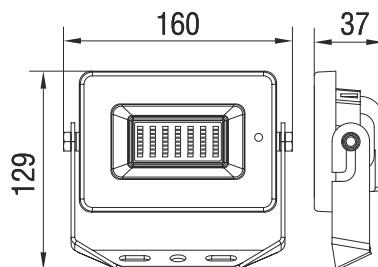

Technical Specifications:

AC 220V 240V Hz 50/60 IP65 RATED CRI >80 RoHS COMPLIANT CE UK CA

Microwave Sensor Specifications:

Input Voltage:	220-240 V/AC	IP Rating:	IP 65	Sensor Type:	Microwave Sensor
Power output:	10W	Protection Class:	Class I	Emmision Frequency:	5.8Ghz
Luminous Efficacy:	>100 lm/W	Dimensions:	160 x 37 x 129mm	Detection Angle:	120°
Lumen Output:	1000±5%lm	Housing Material:	Aluminium	Detection Range:	1-6m adjustable
CCT Options:	3000K±250K	Reflector:	Metal	Delay Time:	10sec-2min adjustable
	4000K±250K	Ambient Temp.:	-20°C to +40°C	Modes:	3 modes adjustable
	6000K±250K	Switch:	Remote Control	Override Facility:	Manual Override
Beam Angle:	>75°	Finish:	Black	Remote Control Range:	Up to 6m
Colour Rendering(CRI):	>80	Warranty:	3 years	Remote Battery Type:	CR2025 included