


TS800 24 Hour Plug-In Time Controller

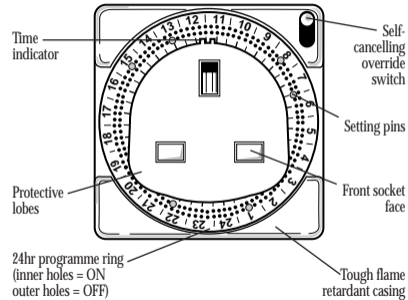

- 1 Turn the programme ring clockwise until the correct time of day is directly above the time indicator at the top of the front socket face (see diagram).
- 2 To programme the controller:-
 - a Decide what times you would like the Timecontroller to switch on and off.
 - b Insert the setting pins into the programme ring according to your requirements. **To switch ON insert the pins into the inner circle of holes. To switch OFF insert the pins into the outer circle of holes.**

Important

The pins should be pushed fully home or they will catch on the underside of the protective lobes on the bottom of the front socket face (see diagram).

- 3 Check your programme by manually turning the programme ring once through the 24 hour cycle. Note: When the pins pass over the time indicator it will require a firm hand.
- 4 Ensure you set the programme ring back to the correct time of day (as in instruction 1).
- 5 Plug the Timecontroller into a socket.
- 6 Plug your appliance into the Timecontroller and switch on the appliance.
- 7 You can switch your appliance on and off at any time, by using the small lever at the side of the Timecontroller 0=OFF, 1=ON. This will self cancel when the next ON or OFF programme operates.

Points to note

- a Each time the Timecontroller has carried out an automatic switching operation the manual switch cannot be operated for about 15 minutes because it is mechanically locked for this period.
- b If required you can programme your Timecontroller to switch off only or switch on only by inserting just the corresponding single pin. For many electrical appliances you can, therefore, programme for off only e.g. to ensure that if you forget to switch the appliance off nothing can burn or unnecessary power be used. With such appliances switch on by hand.
- c The Programme ring can be turned even when the Timecontroller is operating. In case of power failure, please re-adjust the Timecontroller to the correct time of day, turning the dial in a clockwise direction.

HELPLINE
0181-450-8944

TIME GUARD
LIMITED

For a product brochure please contact:
Timeguard Ltd.
Apsley Way, London NW2 7UR

Designed and manufactured in the U.K. 67-058-41

Important

This Timecontroller is recommended for general domestic appliances up to 13 amp resistive or 5 amp inductive rating. Certain washing machines e.g. those with built in timers and some electronic machines require the power to be permanently connected and they cannot use the Timecontroller.

Note: Minimum setting intervals = 15 minutes.
Minimum ON/OFF time between settings = 30 minutes.

Specifications

Operating Temp: 0°C to 40°C
Operating Voltage: 220 - 240V AC 50Hz
Switch Rating: 240V AC 13 amp resistive (3kW)
5 amp inductive
Conforms to Directives: 73/23/EEC & 89/336/EEC



**24 HOUR
PLUG-IN TIME
CONTROLLER**
Cat No. TS800

TIME GUARD
LIMITED

OPERATING INSTRUCTIONS