

Product selected: F58W/860

A new generation of triphosphor coated fluorescent tubes. Using T8 triphosphor tubes in place of T12 and T8 halophosphor tubes increases light levels and extends lamp life, up to 20000 hours when used with electronic control gear, improves colour rendering performance and reduces maintenance and energy costs.

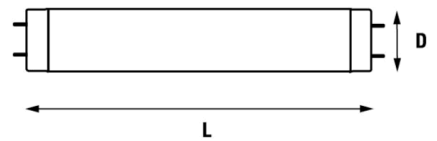
Applications

- Industrial and commercial lighting (stores, offices, industrial areas, supermarkets)
- Special lengths in luminaires with non-standard dimensions, displays, furniture lighting, shops, bathroom luminaires



Features

- High light output; almost constant lumen maintenance throughout life
- High colour rendering (Ra85/Class 1B)
- Consumes 10% less energy than comparable 38mm fluorescent tubes
- Excellent performance (lm/W) and increased luminaire efficiency (5 to 10%)
- Operates on conventional and electronic ballast

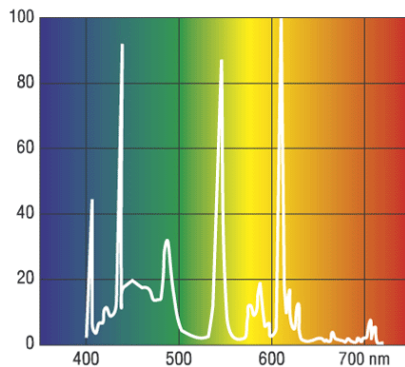
Product Image

Line Drawing

Product Attributes

Item description	F58W/860
Ordering Code	0001532
EAN code	5410288015323
Packing Quantity	25
Wattage (W)	58
Voltage (V)	110
Cap	G13
Max. Over. Length (mm)	1500
Diameter (mm)	26
Light output (lm)	5000
Bulb finish	Daylight Deluxe
CRI	1B

Lamp Cap
G13


T8 max. 25,78
T12 max. 36,52

Spectral Diagram


x = 0.313 CRI (Ra) = 85
y = 0.337 Tc = 6000K