



# Data Sheet

Product Code: XFS6UFOD

**Product Description:** 13A Unswitched Fused Spur + Flex Outlet with Metal Inserts

**Range:** Ultraflat

**Finish:** Brushed Steel

**Product Category:** Fused Spur

**Insert/Knob Colour:** Steel Inserts

**Barcode:** 5021575711660

**Dimensions:** 89x89x35mm

**Faceplate Depth:** 1mm

**Net Weight:** 166g

**Gross Weight:** 168g

**Fixing Centres:** 60.3mm

**Depth from Mounting Face:** 24.3mm

**Recommended Back Box Depth:** 35mm

**Operating Voltage:** 230v 50Hz

**Maximum Load Rating:** Refer to Fuse Value

**Maximum Current Rating:** 13A

**Terminal (Live) Diameter:** 4.5mm; **Capacity:** 4 x 2.5mm<sup>2</sup>

**Terminal (Neutral) Diameter:** 4.5mm; **Capacity:** 4 x 2.5mm<sup>2</sup>

**Terminal (Earth) Diameter:** 3.3mm; **Capacity:** 3 x 1.5mm<sup>2</sup>


**Intended Applications:** Indoor Use Only. Domestic power supply.

**Safety Advice:** Product Must Be Earthed.

**Applicable Safety Standard:** BS 1363-4


**Commodity Code:** 85389091

Declaration of Conformity

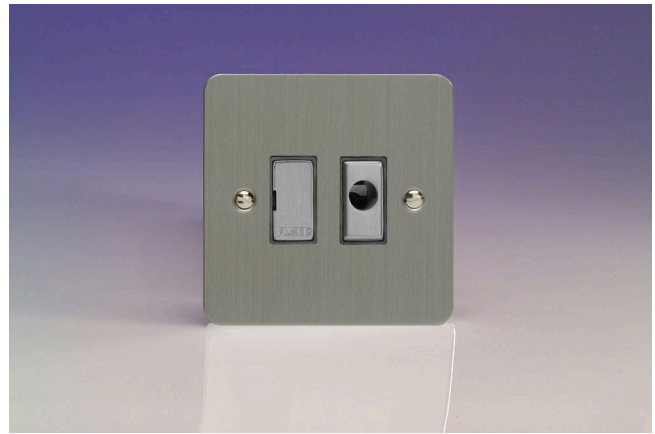

## Product Features

- ☑ Cable clamp
- ☑ Holds standard 25.4x6.4mm fuse
- ☑ Replaceable 13A fuse included
- ☑ Contemporary, ultra-slim faceplate

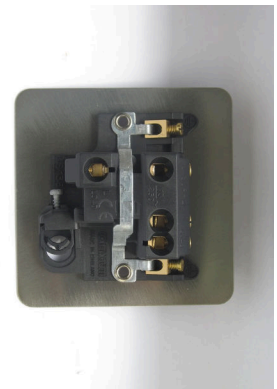

10 YEAR GUARANTEE

BRITISH MADE



*All information is subject to change without notice. Errors and omissions excepted. Images are for illustrative purposes only. Individual features and colours may vary. Refer to date of issue to identify latest version.*

*Date of Issue: 06th February 2022 © Doyle & Tratt Products Ltd, Carylls Lea, Faygate, West Sussex, RH12 4SJ, United Kingdom. All rights reserved.*